




# MOLTIPLICATORE P.T.O. GEARBOX



per pompe  
for pumps

H450 H500 H600 H700

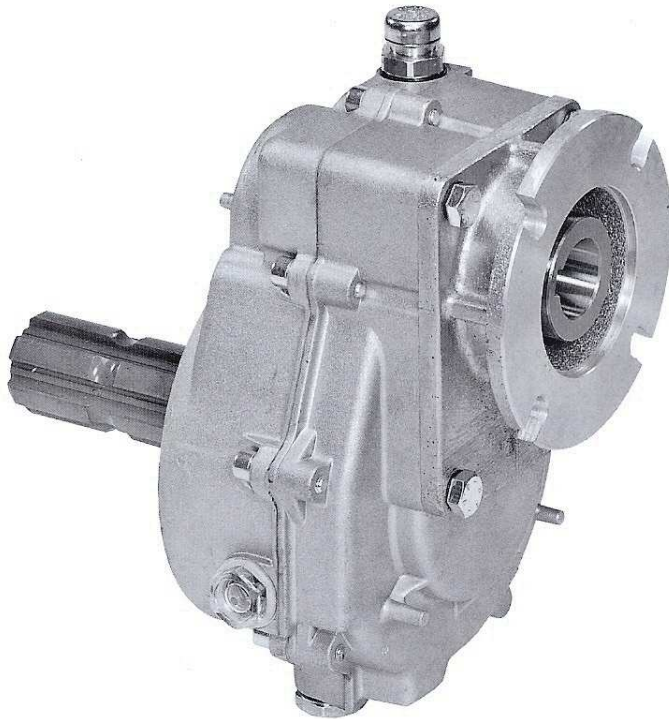

MOLTIPLICATORE per l'accoppiamento delle pompe LEUCO alla Presa. di forza dei trattori.

La velocità di rotazione standard di 540 giri/min viene aumentata dal Moltiplicatore al valore ottimale per il buon funzionamento delle pompe. Diversi valori di velocità di rotazione sono accettati entro il limite massimo di 1400 giri/min in uscita.

*P.T.O. GEARBOX provide the connections for LEUCO pumps to low speed tractor power take-off.*

*The standard power take-off speed, 540 RPM, is increased by the gearbox to optimal speed conditions for the pump.*

*Different input speeds are accepted under condition that output doesn't go over 1400 RPM.*

## Caratteristiche Tecniche Technical Characteristics

cod. 2444.20

Giri entrata <i>input Speed</i>	Coppia entrata <i>input Torque</i>	Giri uscita <i>output Speed</i>	Coppia uscita <i>output Torque</i>	RR <i>Ratio</i>	Potenza max. <i>max. Power</i>	Peso <i>Weight</i>
RPM	Nm	RPM	Nm	n1/h2	kW	Kg
540	152	1080	76	2	8.5	6

## DIMENSIONI d'ingombro

### Overall DIMENSIONS

